

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 17 TOWNSHIP 16 RANGE 5

DATE: 10-01-03

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison



METHOD OF ESTABLISHMENT: County: 6-22-97

IN. S.P.C. E ZONE NAD '83

NAME: 16051701

N: 509881.6290(m)

E: 70597.1390(m)

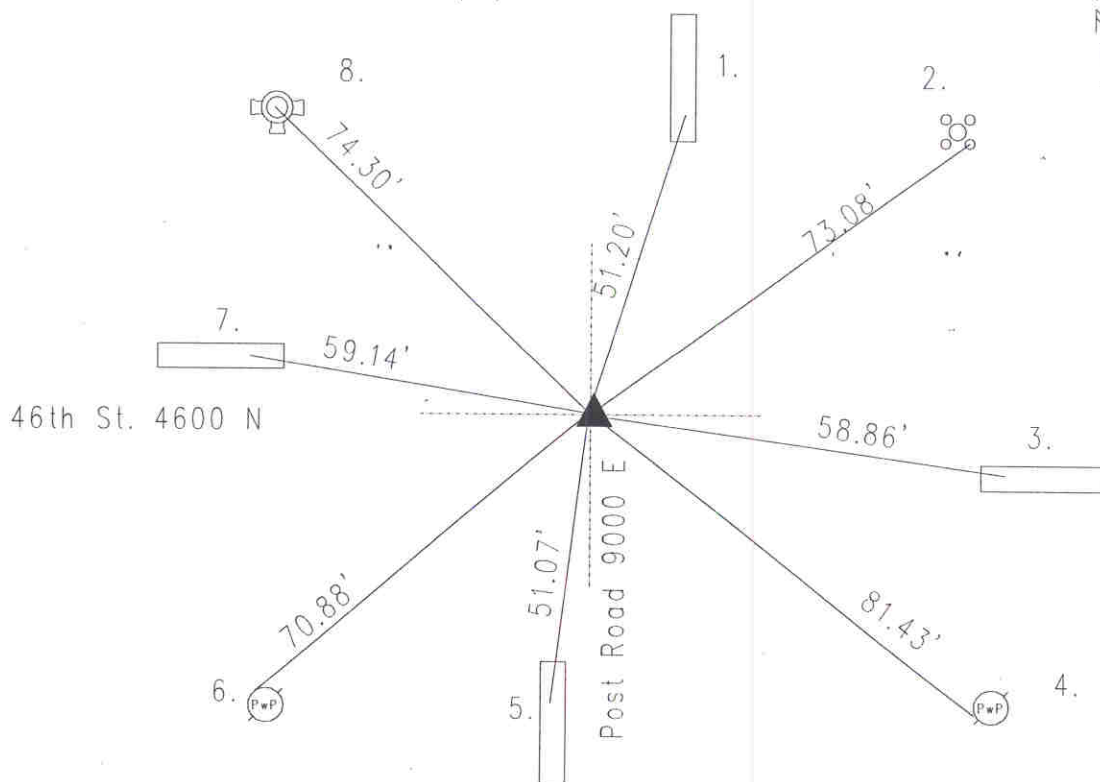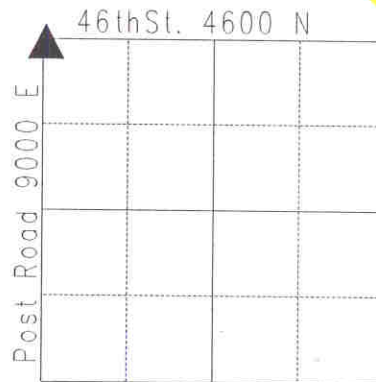

Original post set 1820 by Hendricks with witness: 16' beech S 27 E 8 links; 12" beech N 15 W 46 links per Marion County Atlas pg. 15. There is no reference to this corner per Lawrence Township Legal Survey Book . 6-17-48 called brass pin in steel box. Reference, no date, called PK nail. 3-17-75 called railroad spike at surface and copperweld .25' down and p.05'S. Excavated 3-14-85 Harrison set. Re-tied 6-22-97. Re-tied 10-01-03. by Wilcoxon.

16051701

REF.	DISTANCE	DESCRIPTION
1.	51.20'	Cut 'x' in median
2.	73.08'	Cut 'x' SE-bolt of aluminum pole base
3.	58.86'	Cut 'x' in median
4.	81.43'	Mag nail w/brass washer SW PwP#18-381 AB 4"up
5.	51.07'	Cut 'x' in median
6.	70.88'	Mag nail w/brass washer NW PwP#235-381 B 4"up
7.	59.14'	Cut 'x' in median
8.	74.30'	Top nut of fire hydrant